

AC 400

Cummins
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	400,00	320,00	360,00	288,00	519,00

FDGDE

GC ;) &

) & z

FDGDE

%\$i % %&

GC " \$(*"

z&(

GC

Standard Specifications

z

fl ! E

z

z

ALTERNATOR

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

TRANSFER SWITCH

!

!

!

!

!

!

!

AC 400

Cummins
Mecc Alte
D+' &'


Manufacturer		Cummins		
Model		NTA 855 G4		
		%\$\$' "# "		
		')% "		
		Q+\$\$<DQ		
	L	14,00		
	"	140 x 152		
		14,0:1		
	fl # ı	"# "	1500	
	fl ı	L	38,60	
		L	71,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	24,50		
	' # "	498		
fl ' # ı	' # "	67,60		
	° C	524		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	76,00	57,00	39,00

		Mecc Alte
		ECO 40-1S
	Hz	50
	"	400
7cg'		0,80
		3
	fl ı	400/230
	A	577
Temperatur		H

		fl ı		fl ı	
	"	"	"	"	L
AC 400	3130	3250	1150	2000	650
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4250	4550	1460	2300	650

AC 400

Cummins
Mecc Alte
D+ &

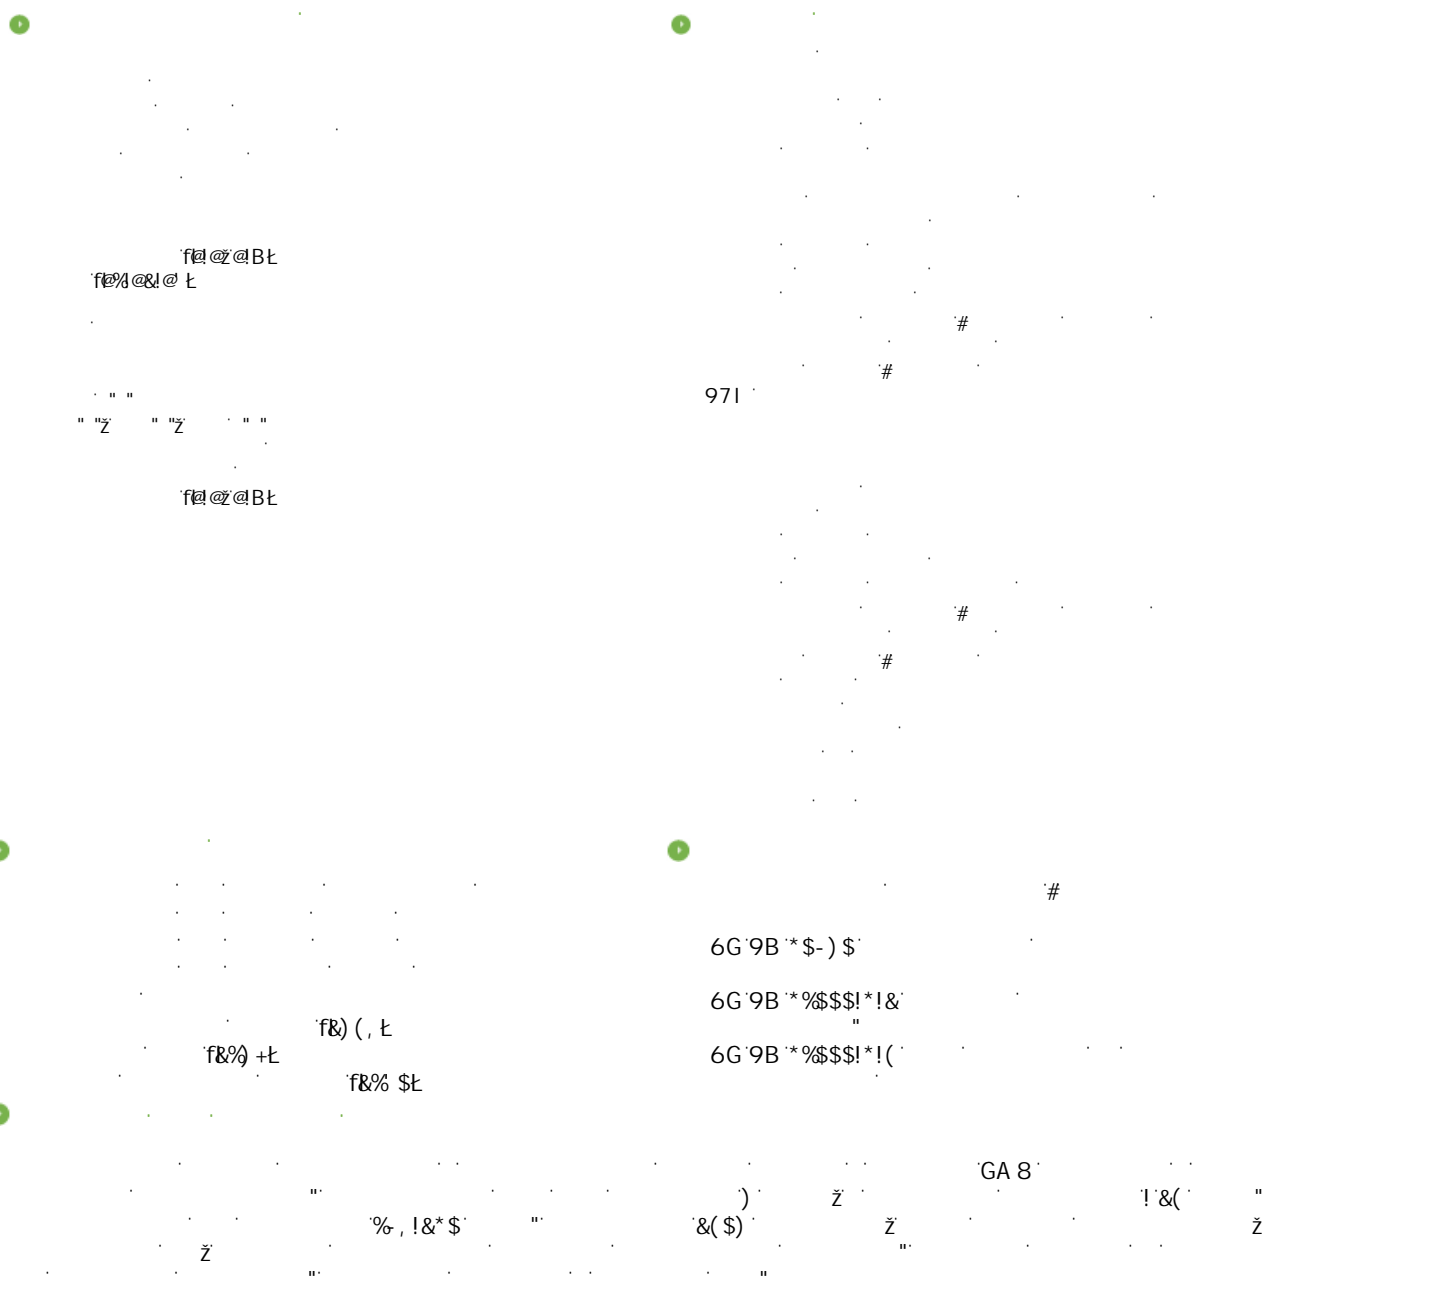

AC 400

Cummins
Mecc Alte
D+ &''

5? +\$!



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

1

" f! \$\$\$! '%&\$\$' Ł

ž ž " "

2

ž ž ž ž

'&\$\$\$#/(# "

	"	1460
f! "Ł	"	4550
f! "Ł	"	2300
		650